

Basic line

Operation Manual: 09.108854

Product: Wall & Ceiling Sander Handysand Basic Line

Model Part Number: 23.6011001, 23.6001102,

23.6001103, 23.6001104


Product Number	23.6011001	23.6001102	23.6001103	23.6001104
Handysand Edition	Basic Bare	Basic XXL	Basic Smart	Basic Transport
Sander Line	Basic Line	Basic Line	Basic Line	Basic Line
Sanding Type	A.R.S. Self Grip	A.R.S. Self Grip	A.R.S. Self Grip	A.R.S. Self Grip
Rated Power	750 watt	750 watt	750 watt	750 watt
Voltage	220/110 volt	220/110 volt	220/110 volt	220/110 volt
Speed r.p.m.	550 - 1350	550 - 1350	550 - 1350	550 - 1350
Drive Cable	8mm	8mm	8mm	8mm
Power Cable	5m	5m	5m	5m
Weight	4.8kg	4.8kg	4.8kg	4.8kg
Overall Length	163cm	208cm	208cm	163cm
Working Height	283cm	328cm	328cm	283cm

VEZOS Drywall sander Handysand is a wall & ceiling sander. Due to VEZOS A.R.S. technology (Auto regulated Suction) the Handysand Basic sander will grip to the surface and allow you to sand without lifting the weight of the sander. A retractable extension may be used in all set-up versions.

VEZOS Handysand Basic sander, is a one piece long neck sander, with a telescopic extension of 45cm, for reaching high sanding areas, no tools needed.

Note: In order to achieve the best gripping effect, work with a professional vacuum collector with an efficient self-cleaning filter. All VEZOS sanders, connect to any branded vacuum cleaner, with the vacuum connectors included in your purchased edition for dustless sanding in & outdoors.

For further tips or advice regarding the Handysand Combo drywall sander, refer to our website www.vezos.co.uk or email our technical service department at technical@vezos.co.uk

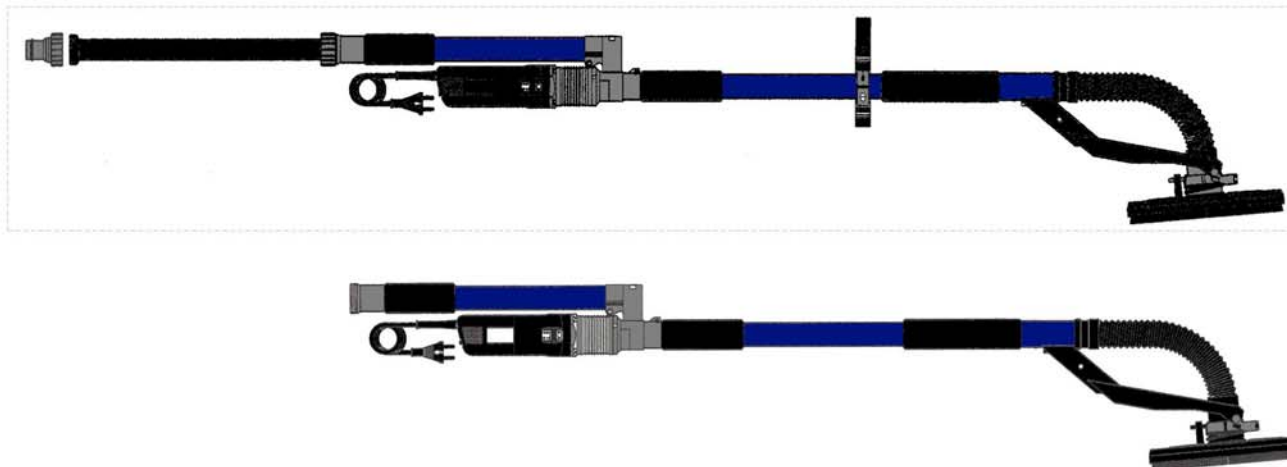


Retractable Extension

Push—Pull & Secure, when in need of that extra length while

Soft Grip

Anti slide soft grips are placed in three main parts of the sander,

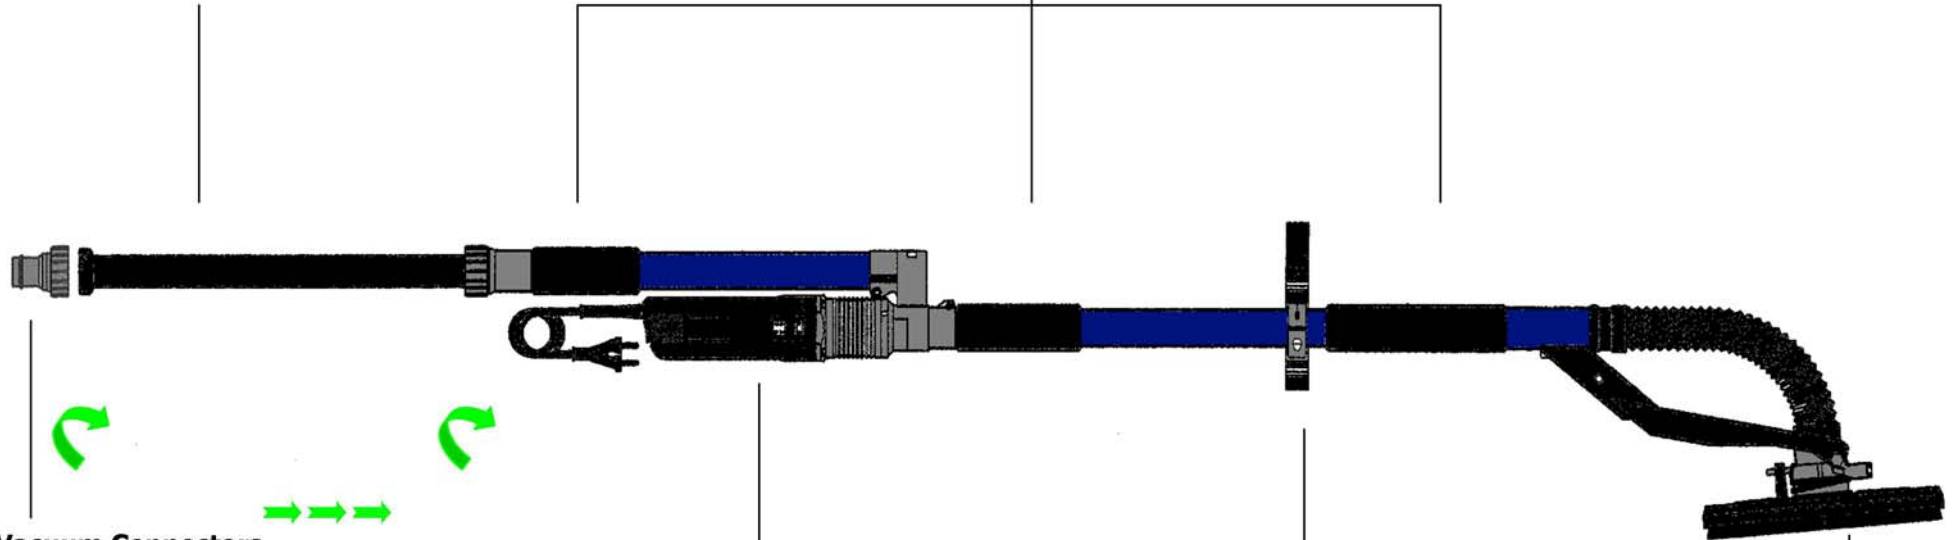

Vacuum Connectors

Two different sizes of connector are available, 32mm & 38mm (recommended). Simply connect

Powerful Motor

Equipped with a powerful 750 watt motor & an extra long power cord.

Grip on Handle



Attach the handle to any part of the main body.

ARS Technology

Auto Regulated Suction is active on all Handysand versions.

Powerful 750 watt motor

Retractable extension 45cm

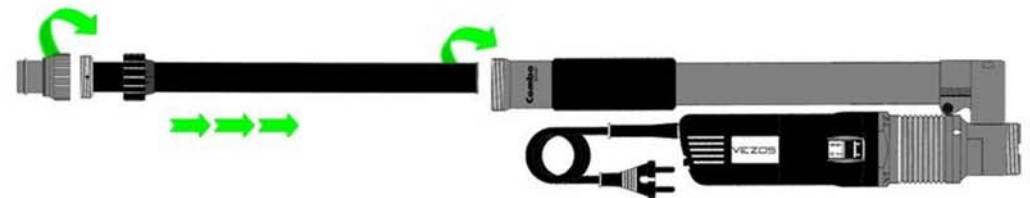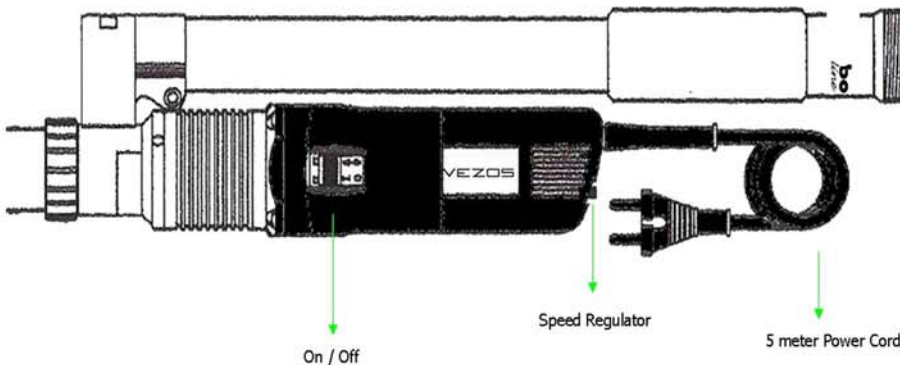

The Retractable Extension may be purchased as an accessory with the basic Edition. Included in the standard XL edition.

When purchasing your Handysand Basic Drywall sander, make sure that you have read all the Operation and Technical instructions, before powering up your device.



Together with your new sander, you will find the abrasive disc, extra available purchase sizes from P40-P220, attach the disc on the head. For that extra boost in length adapt the retractable extension (depending on model– also available as an accessory and use at preference.

To achieve the ARS function, you will need to connect the Handysand drywall sander, to any branded professional vacuum cleaner, to the rear end of your tool. International vacuum hose sizes are 32 & 38mm,, you will be provided with a vacuum connector and other sizes are available upon request, VEZOS recommends for better gripping results to use the 38mm connector to the equivalent hose. Also the Handysand line accessories include a pressure release adapter, for manually releasing the suction, when necessary.

Hold on firmly to your tool, once you are comfortable and feel secure with the way you are holding the Handysand, then power up.

Approach the necessary surface, and simply start sanding.


Beware of any nails or sharp edges, if you sand over these mentioned parts, then most possibility you will tear the abrasive pad.

While preparing your surface we suggest that any nails are removed initially.

When finishing the job, always clean your tool, for long life durability.




Vacuum Connectors & Pressure Releaser

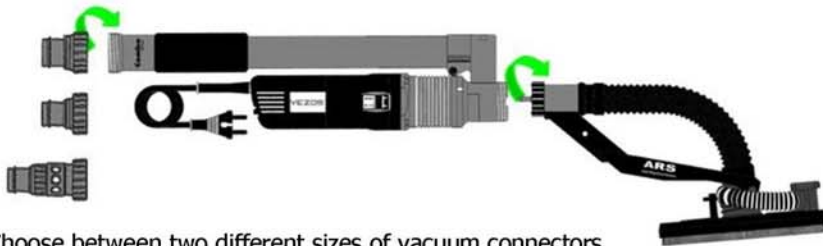

Choose between two different sizes of vacuum connectors
32 & 38 mm or your manual pressure releaser.

Grip On Handle—Where to attach it

No Rules, just find the position that fits you the best, simply tighten the clamp and use the handle to drive or hold on to your Handysand drywall sander

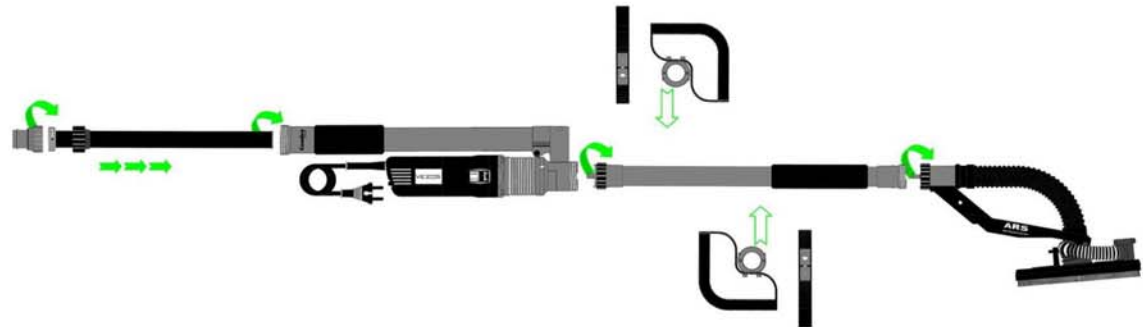

Use of Device

The Handysand Basic editions may be operated on surfaces such as:

- Painted walls and ceilings
- Drywall, cement walls, ceilings and floors

The device has been manufactured and designed for use under normal conditions and not in an explosive environment.

When not in use, you should place the device in such position that it is not worn, where there is no risk of it falling or causing an accident to nearby person.

General Instructions

Read the complete guide manual before starting off your device. Get yourself familiar with the controls and usage of the device. This device is not intended for use by persons (including under aged) with reduced physical, sensory or mental capabilities, lack of knowledge. Never allow children to use the device. Never use the device when there are children or pets nearby. The user is responsible for any accidents or hazards suffered by third parties or their property. Always check the device, the power cord and the extension cable before using the device. Only operate the tool when it is in good working order and is not damaged in any way. Damaged parts have to be replaced immediately by a qualified service point. Contact manufacturer company for information.

When purchasing your Handysand, make sure that you have read all the Operation and Technical instructions, before powering up your device. Connect the Motor end to the Head Attachment for your mini version of the Handysand II. For longer versions of the sander, you may adapt 1-3 main extensions. For that extra boost in length adapt the retractable extension and use at preference. Together with your new sander, you will find the abrasive disc, extra available purchase sizes from P40-P220, attach the disc on the head. To achieve the ARS function, you will need to connect the Handysand, to any branded professional vacuum cleaner, to the rear end of your tool. International vacuum hose sizes are 32 & 38mm, for this reason by purchasing the XL edition, you will be provided with two sized vacuum connectors, VEZOS recommends for better gripping results to use the 38mm connector to the equivalent hose. Also the combo line accessories include a pressure release adapter, for manually releasing the suction, when necessary. Hold on firmly to your tool, once you are comfortable and feel secure with the way you are holding the Handysand II, then power up.

Approach the necessary surface, and simply start sanding. Beware of any nails or sharp edges, if you sand over these mentioned parts, then most possibility you will tear the abrasive pad. While preparing your surface we suggest that any nails are removed initially. When finishing the job, always clean your tool, for long life durability. Place your tool in a secure and safe area, do not leave the tool in an outdoor environment.

Work Area

Keep your workplace clean and well-illuminated. Do not use this device in an environment where there you run the risk of explosion due to flammable materials or dust.

Troubleshooting guide

In case the device does not start up, check the following:

The power line is connected to an active outlet

The main switch is at the «on» position

In case the device does not work as expected, check the following:

The abrasive disc is sufficiently attached to the abrasive pad of the device

The abrasive pad is in good condition

There is no dust or other material blocking the flow of the air through the device

The entire surface of the disc is in (vertical) contact with the working surface

Check if the devices outer casing/suction hose or shaft is damaged or torn. If the device still does not function as expected, or if you notice strange or unusual operation of the device, contact the distributor or manufacturer.

Warranty

VEZOS warrants that greatest efforts will be made to make sure that at the time of delivery all products to be sold to the Distributor shall be free from any defects in material or workmanship. VEZOS after an examination on the problem shall credit, repair or replace, without charge to the Distributor, any such Products that are defective or nonconforming, provided that the Distributor notifies VEZOS of such defective and non-conforming Products by filling the Warranty Claim Form with all the essential information reading the warranty problem. This warranty is conditioned upon the prepaid return of the equipment claimed to VEZOS for verification of the claimed defect. If the claimed defect is verified, VEZOS will repair or replace for free of charge, any defective parts. The equipment will be returned to the original purchaser transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the cost of parts, labour and transportation for testing and evaluation. The credit if the Product, repair or replacement of the Product will be executed only after an examination from VEZOS that for the maintenance and repair of the Products the directions and specifications that are described within the technical manuals of the Products are supplied with the Products, have been followed. The afore-mentioned obligations stretch no further that the warranty VEZOS can claim from his suppliers of each material products. VEZOS makes no warranty and disclaims all implied warranties of merchantability and fitness for a particular purpose in connection with accessories, equipment, materials or components sold but not manufactured by VEZOS. These items sold, but not manufactured by VEZOS (such as electrical parts etc) are subject to warranty, if any, of their own manufacture.

This warranty covers only and exclusively credits of the Product, repairs or replacement of Products and under no circumstances does it cover any other demand for income loss, workmanship damages and accidents of people or users.